



# C100

Practical bottle-free water dispenser  
for entry-level applications

- A great value dispenser that supplies refreshing filtered water for small to medium size workplaces.
- Ideal solution for perfectly cold, ambient and hot water at a competitive price.
- Carbon filtration for an unlimited supply of fresh, great tasting water.



**Mains-fed water cooler**  
Countertop / Freestanding



## Product features and benefits



### Functional and convenient design

Simple, straightforward functionality without compromising on quality.

The 215 mm dispensing height is suitable to accommodate average size reusable bottles.

1200 ml drip tray capacity to collect accidental spillage.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.



### Fine water quality

Simple push button dispense.

Carbon filtration removes impurities for superior quality water with improved taste and clarity.

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.



RECOMMENDED



FLOW RATE



### User-friendly hydration point

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.


Two-steps action hot water safety mechanism can help to avoid accidental spillage.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate reusable water bottles.





## Technical specifications

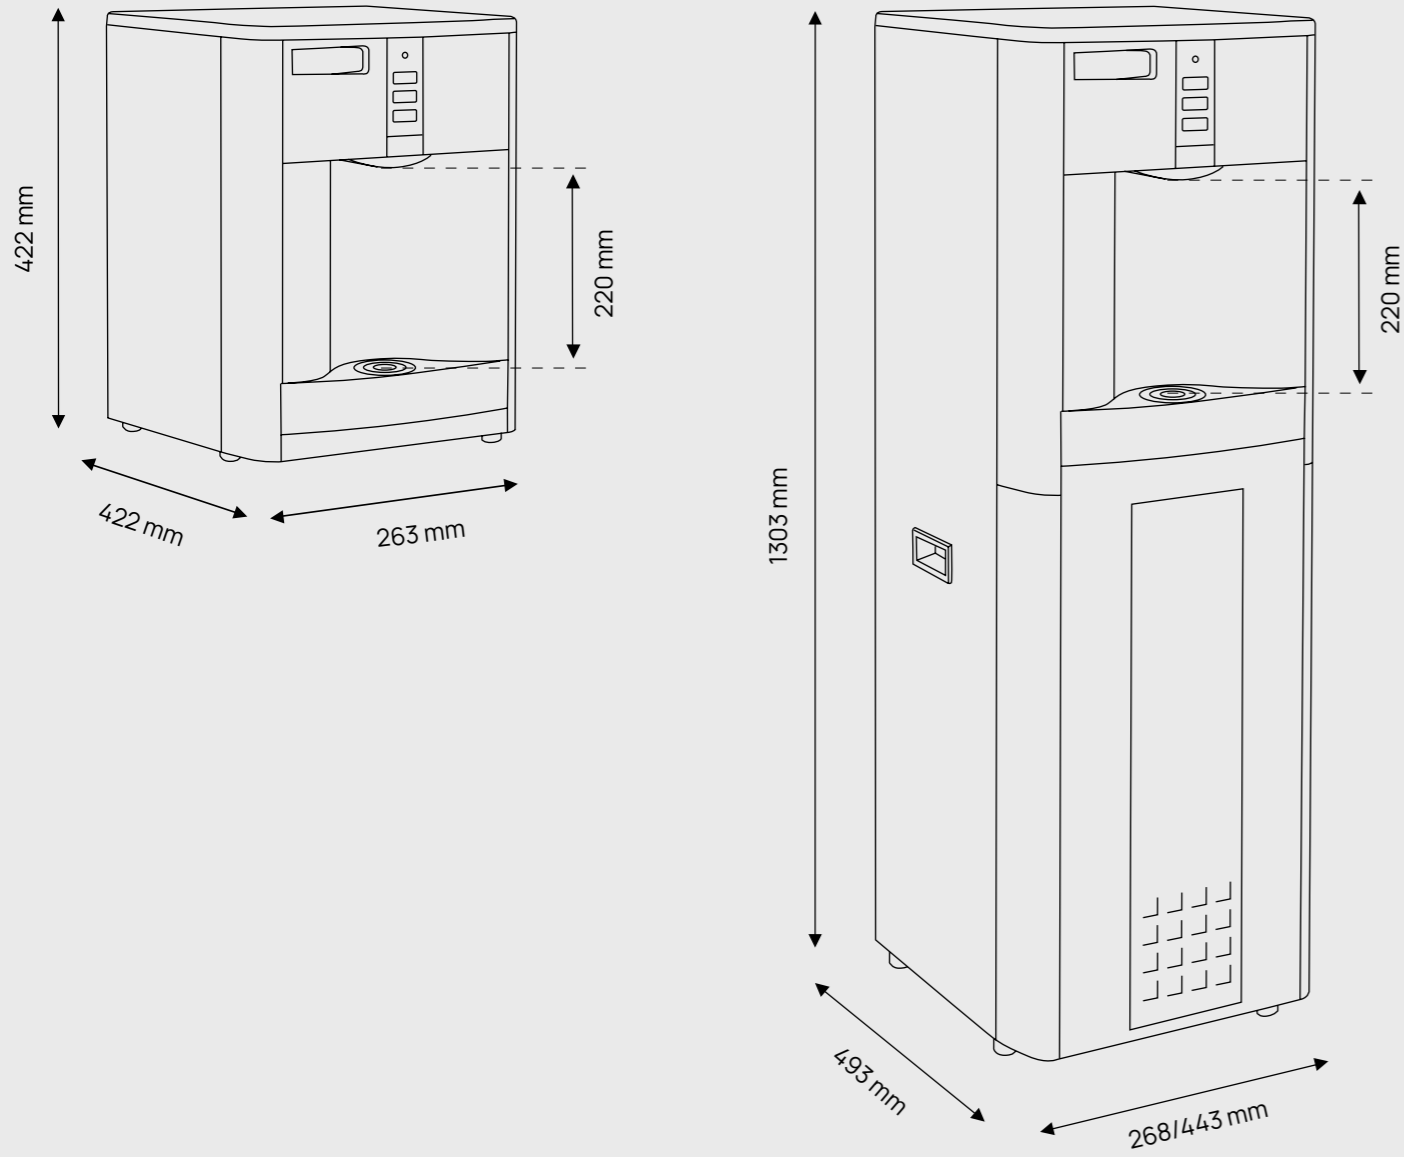

## Water options

Ambient	Cold	Hot
		
		

## Specifications

Model	Countertop	Freestanding
<b>Dimensions W x H x D</b>	345mm x 450mm x 367mm	345mm x 1022mm x 367mm
<b>Variants</b>	Hot & Cold, or Cold & Ambient	Hot & Cold, or Cold & Ambient
<b>Weight</b>	18 Kg	23 Kg
<b>Dispensing area height</b>	215mm	215mm
<b>Drip tray capacity</b>	1200 ml	1200 ml
<b>Internal waste</b>	No	No
<b>External waste</b>	Yes	Yes

## Technology and performance

<b>Water purification system</b>	None	None
<b>Antimicrobial protection</b>	BioCote®	BioCote®
<b>Recommended filtration</b>	Carbon Block	Carbon Block
<b>Refrigerant gas</b>	R600a	R600a
<b>Cooling technology</b>	Cold tank	Cold tank
<b>Cold tank capacity</b>	2 L	2 L
<b>Hot tank capacity</b>	1.5 L	1.5 L
<b>Dispensing capacity (flow rate - Ltrs/min)</b>	1.8	1.8
<b>Target temperature - Cold Water</b>	5°C	5°C
<b>Target temperature - Hot Water</b>	87°C	87°C
<b>Max operating pressure</b>	3 bar	3 bar
<b>CO2 operating pressure</b>	No sparkling option	No sparkling option
<b>Max electrical consumption</b>	Hot & Cold: 600 W Cold & Ambient: 100 W	Hot & Cold: 600 W Cold & Ambient: 100 W

## Installations requirements

<b>Power supply</b>	220V-240V / 50Hz	220V-240V / 50Hz
<b>Water supply</b>	Potable Water / Min Pressure 2bar	Potable Water / Min Pressure 2bar
<b>CO2 Gas</b>	N/A	N/A
<b>Mains waste</b>	Where the drip tray is connected to external waste	Where the drip tray is connected to external waste
<b>Ventilation</b>	An air gap of 100mm is required	An air gap of 100mm is required

**Culligan**<sup>TM</sup>  
Water you love.<sup>TM</sup>

