

Culligan

C100

Convenient bottle-free water dispensing unit for budget applications

A great value dispenser, that supplies refreshing filtered water for the workplace, helping businesses with reducing single plastic bottle use. Recommended for up to twenty users, the C100 is the ideal solution for perfectly chilled, ambient and hot water at a competitive price.



Cost and convenience



Sustainability



easy to use

Product features and benefits



Sustainability

Eco-friendly refrigeration using **R600a**: naturally occurring refrigerant gas with **low GWP** (Global Warming Potential) and **zero ODP** (Ozone Depletion Potential) BPA free and better for the environment.

Sleep mode to **save energy** when the unit is not in use.



Hygiene and convenience

The key plastic surfaces surrounding the dispensing area are infused with **BioCote® technology**, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria and **reduces the risk of cross-contamination**.

Contactless dispensing also available by foot pedal controls for **greater hygiene** and piece of mind (optional add-on).



Ease of use

Dispensing operations are intuitive with simple-to-use **push buttons**, including **two steps hot water safety mechanism** for peace of mind.

Easy connection to the existing mains water supply.

Generous **drip tray capacity** to collect accidental spillage.




Water quality

Carbon filtration removes impurities and effectively targets color, taste and odour, for great tasting, crystal-clear and **superior quality water**.





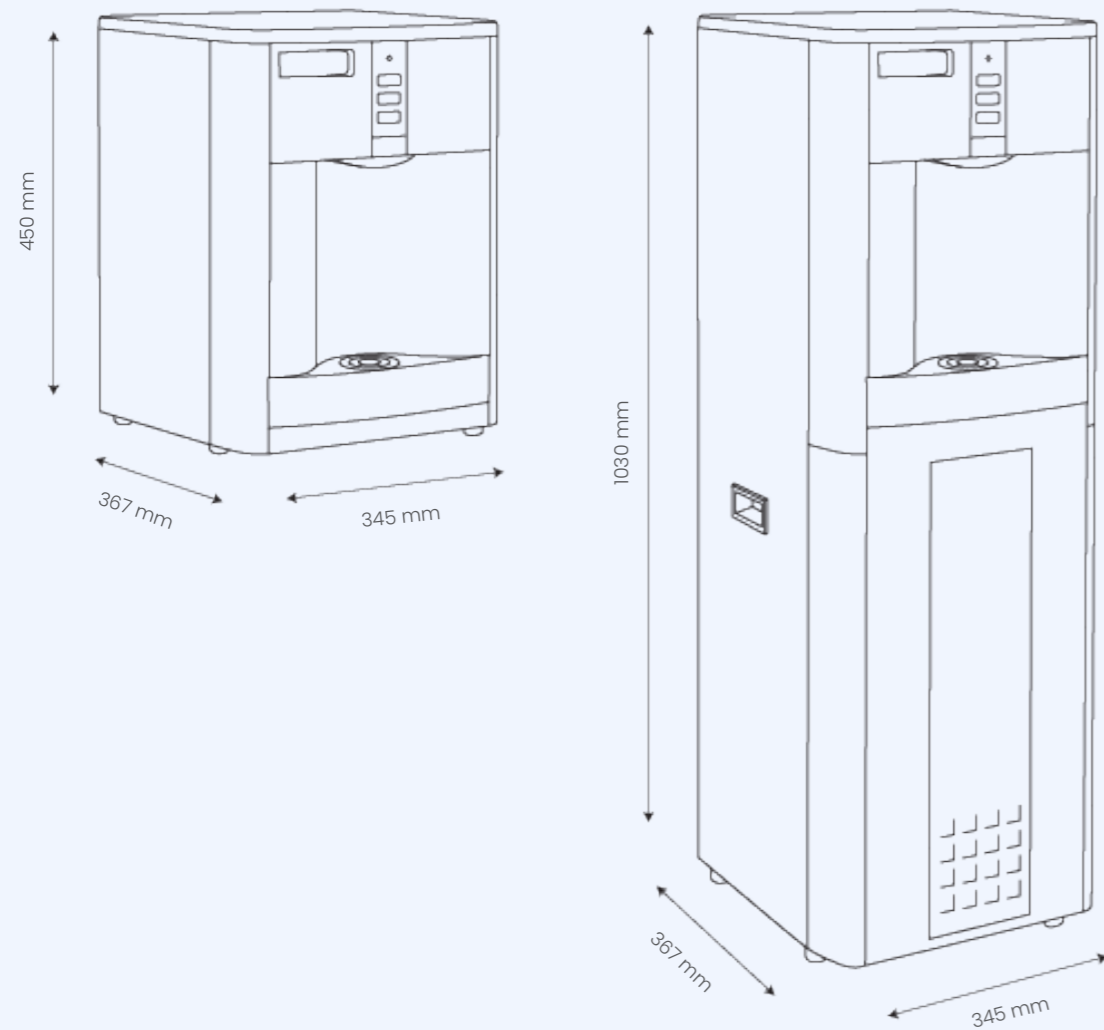

Technical specifications



Types available	Freestanding and countertop
Dimensions	Freestanding 345 mm (W) x 1030 mm (H) x 367 mm (D) Countertop 345 mm (W) x 450 mm (H) x 367 mm (D)
Weight	Freestanding: 28 kg Countertop: 23 kg
Recommended filtration	Carbon CBC
Dispensing area height	220 mm
Drip tray capacity	1.5 litres
Storage capacity	Cold tank: 2 litres Hot tank: 1.5 litres
Power supply	220V-240V/50Hz
Refrigerant gas	R600a
Min/max water temperature	Cold: default 5°C Hot: default 85°C

Water options

	cold	sparkling	ambient	hot	extra hot
C+H					
C+A					

Contact us today

www.culligan.ie
+353 1466 0133
sales@culligan.ie

Tested and certified

