

Culligan®

C2 Firewall®

Bottle-free water dispenser with excellent purifying performance, easy operation and stylish design

With a choice of hot and cold, or cold and ambient, the C2 Firewall® is the preferred solution for any small or medium size workplace looking for purified, great tasting water, reliability and guaranteed quality.

Built from high-quality materials for aesthetics and durability, the C2 Firewall® presents sleek lines and a streamlined design with silver accent trims, to seamlessly complement any workplace interiors.



Purification



Hygiene guarantee



Easy to use



Sustainability

Product features and benefits




Purification technology and hygiene


Culligan's patented and certified **Firewall UVC purification** system thoroughly purifies the water all the way to the point of dispense, for microbiologically safe water. It eliminates up to **99.9999% bacteria**, 99.99% viruses and 99.9% cysts.



The key plastic surfaces surrounding the dispensing area are infused with **BioCote®**, a silver ion additive that provides **continuous antimicrobial product protection** against a broad spectrum of bacteria, mould and fungi, helping to reduce unpleasant odours and degradation of key surfaces.



The unit is also **internationally HACCP certified**, meaning the highest levels of hygiene and safety in water provision are guaranteed.

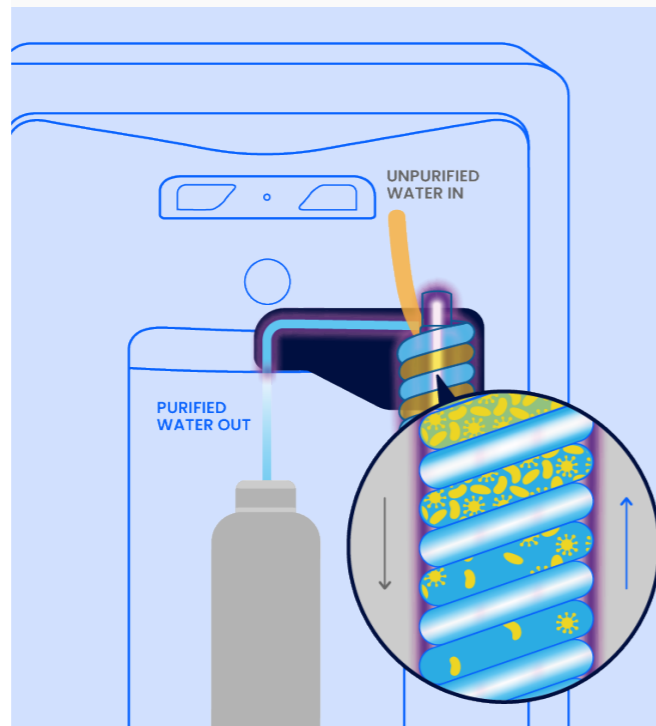

Ease of use

Its simple and intuitive dispensing controls allows to easily choose between cold/hot or cold/ambient water at a simple press of a button.

The **230 mm dispensing gap** is suitable to accommodate average size (500 ml max) reusable bottles.




Sustainability

It removes the reliance on single-use plastic, helping businesses to reduce their overall carbon footprint and single-use plastic consumption by providing great tasting purified water on demand.





Eco-friendly refrigeration using R600a: naturally occurring refrigerant gas with low GWP (Global Warming Potential) and zero ODP (Ozone Depletion Potential).

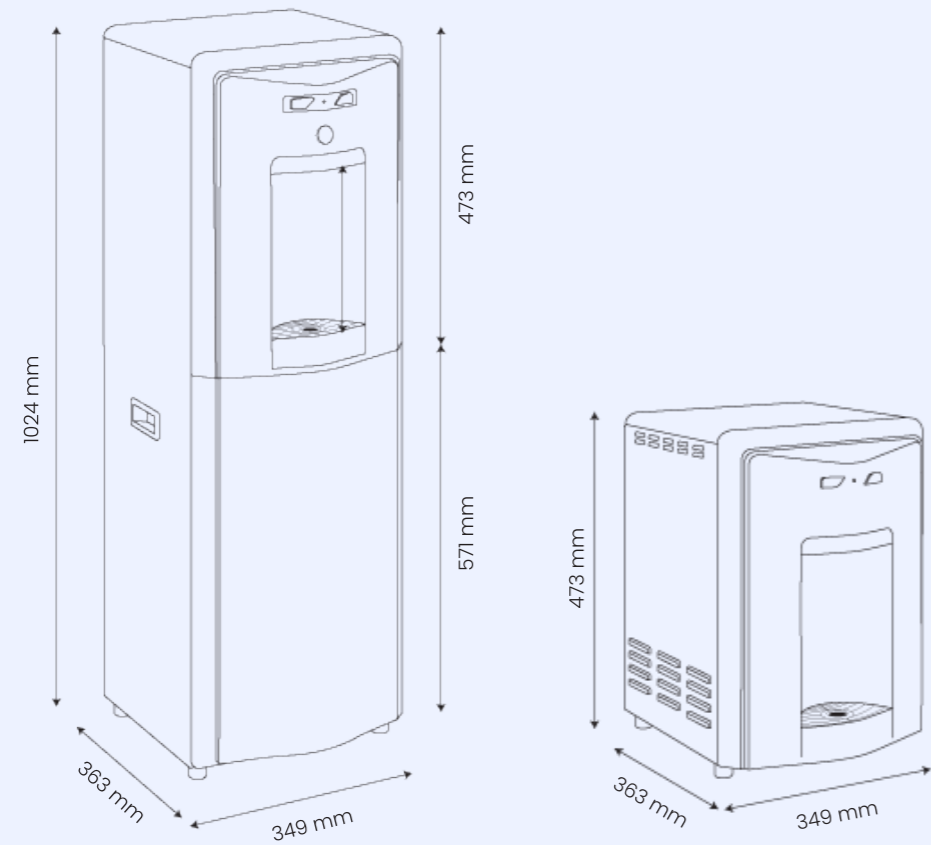

Technical specifications



Water options

	cold	sparkling	ambient	hot	extra hot
C+H					
C+A					

Types available	Countertop and freestanding
Dimensions	Countertop 349 mm (W) x 363 mm (D) x 473 mm (H) Freestanding 349 mm (W) x 363 mm (D) x 1024 mm (H) [Standard]
Weight	Countertop: 20 kg (net) - 24 kg (gross) Freestanding: 27 kg (net) - 29 kg (gross)
Water purification system	Firewall UVC technology
Recommended filtration	Carbon CBC
Dispensing area height	230 mm
Drip tray capacity	360 ml
Storage capacity	Hot tank: 1.5 litres Cold tank: Countertop 2 litres Freestanding 4 litres
Power supply	230 V/50 Hz
Compressor	1/8 HP
Refrigerant gas	R600a
Min/max water temperature	Cold: default 5°C Hot: default 85°C

Contact us today

www.culligan.ie
+353 1466 0133
sales@culligan.ie

Tested and certified



Firewall technology is certified by IAPMO R&T to NSF/ANSI 55 Class A, NSF P231, US EPA Microbiological Guide Standard, NSF/ANSI 372 and CSA B483.1.

