

C3 Firewall

Modern and elegant bottle-free water dispenser with excellent purification performance

- Sleek aesthetics and reliability make
 this machine a popular product for small
 to medium size workplaces in the healthcare,
 educational and corporate environments.
- Firewall® safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Up to four water options.





Product features and benefits





RECOMMENDED

FLOW RATE



Elegant and professional design

Compact and modern design crafted with durable silver-colored materials, to seamlessly complement any workplace interior.

Touch sensitive and intuitive controls facilitate the unit's performance for easy dispensing operation.

The user interface features LED UV fault indicator for easier servicing.

The 215mm dispensing height is suitable to accommodate average size reusable bottles.

300 ml removable drip tray featuring BioCote® antimicrobial surface protection.



Superior purification performance

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.

Patented Firewall® UV-C purification technology guarantees microbiologically safe water by deactivating up to 99.9999% bacteria, 99.99% viruses, and 99.9% cysts.



Water of your choice

Available in 2 water options: Hot & Cold, or Cold & Ambient.

Two-steps action hot water safety mechanism can help to avoid accidental spillage.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate re-usable water bottles.

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.

99.9999%


Firewall® UV-C purification technology thoroughly purifies the water all the way through to the point of dispense.








Technical specifications



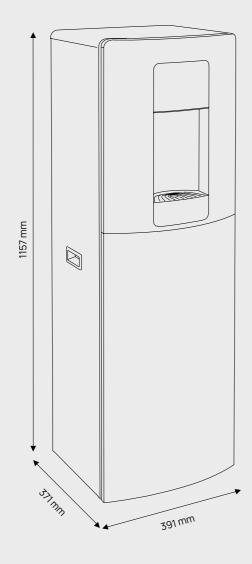

Water options

Ambient	Cold	Sparkling	Hot	Extra Hot
	*	ं ं	()	\$ \$\$
\Diamond	*		()	\$ \$\$
\Diamond	*	:0°		
\Diamond	*			

Specifications					
Model	Countertop	Freestanding			
Dimensions W x H x D	395 mm x 480 mm x 460 mm	395 mm x 1157 mm x 365 mm			
Variant	Hot & Cold, or Cold & Ambient	Hot & Cold, or Cold & Ambient			
Weight	25 Kg	30 Kg			
Dispensing area height	215 mm	215 mm			
Drip tray capacity	350 ml	350 ml			
Internal waste	No	No			
External waste	No	No			
Technology and performance					
Water purification system	Firewall® UVC technology	Firewall® UVC technology			
Antimicrobial protection	BioCote®	BioCote®			
Recommended filtration	Carbon Block	Carbon Block			

recnnology	and performance

Firewall® UVC technology	Firewall® UVC technology
BioCote®	BioCote®
Carbon Block	Carbon Block
R600a	R600a
Cold tank	Cold tank
2 L	4 L
1.5 L	2L
1.6	1.6
5°C	5°C
Hot: 87°C / Extra Hot: 92°C	Hot: 87°C / Extra Hot: 92°C
3 bar	3 bar
No sparkling option	No sparkling option
Hot & Cold: 930 W Cold & Ambient: 138 W	Hot & Cold: 930 W Cold & Ambient: 138 W
	BioCote® Carbon Block R600a Cold tank 2 L 1.5 L 1.6 5°C Hot: 87°C / Extra Hot: 92°C 3 bar No sparkling option Hot & Cold: 930 W

Installations requirements

Power supply	220V-240V / 50Hz	220V-240V / 50Hz
Water supply	Potable Water / Min Pressure 2bar	Potable Water / Min Pressure 2bar
CO2 Gas	Food Grade CO2 Gas	Food Grade CO2 Gas
Mains waste	Not required	Not required
Ventilation	An air gap of 100mm is required	An air gap of 100mm is required













