



Kalix

Bottle-free water dispenser with robust design and proven performance

- Ideal solution for high usage environments, such as workplaces, receptions and education sites.
- Featuring stainless steel pressure vessel - for cold water and hygiene benefits.
- Available in two water option variants - Cold & Ambient, or Hot & Cold.



Mains-Fed Water Cooler
Freestanding

Product features and benefits



Robust and practical design

Contemporary design and efficient operations to satisfy different hydration needs.

The unit features push buttons for water dispensing, with an integrated cup holder on top.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate reusable water bottles.



Intuitive and safe user experience

The dual button control ensures safe dispensing of hot water.

Tall dispensing area (210 mm) fits various bottle sizes for easy refill.

Generous (300 ml) removable drip tray capacity to collect accidental spillage.

Storage space for filters and CO2 bottles.



Water of your choice

This solution comes in two variations, featuring different water options (Cold & Ambient, Hot & Cold).


The direct chill technology provides instantly cold water and significant hygiene benefits.

The unit is recommended for 15 - 30 users.

Internal drainage system with a capacity of 5 litres. The removable self-draining drip tray is dishwasher-safe for added hygiene and convenience.



Technical specifications

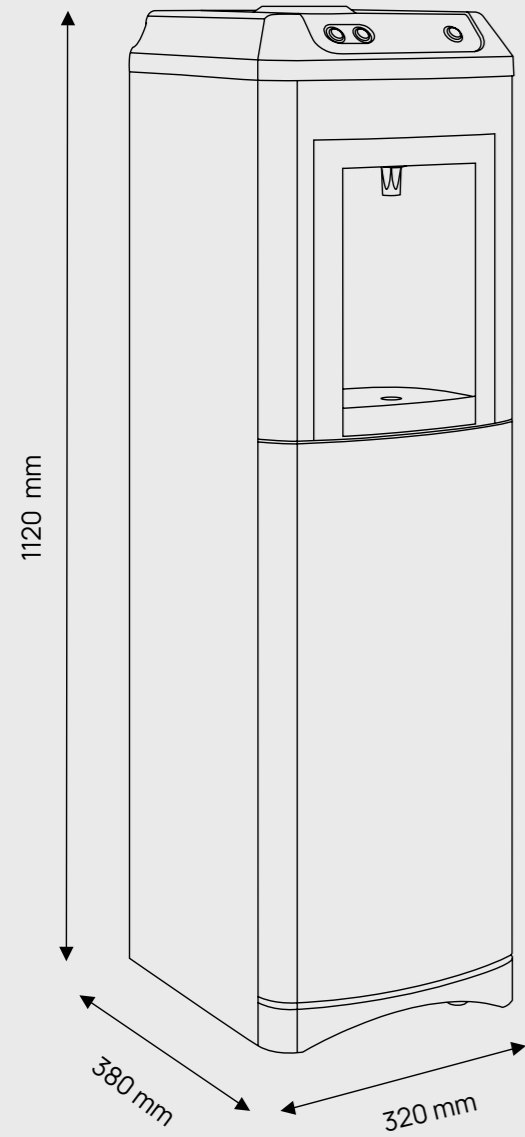

Water options

Ambient	Cold	Sparkling	Hot
☾	*	☼☼	
	*	☼☼	}}
☾	*		
	*		}}

Specifications

Model	Freestanding
Dimensions W x H x D	320mm x 1120 mm x 380mm
Variants	Hot & Cold, or Cold & Ambient
Weight	Hot & Cold: 24.6 Kg / Cold & Ambient: 23.4 Kg
Dispensing area height	210mm
Drip tray capacity	300ml
Internal waste	Yes (5Ltrs)
External waste	No

Technology and performance

Water purification system	None
Antimicrobial protection	None
Recommended filtration	Carbon Block
Refrigerant gas	R600a
Cooling technology	Cold tank
Cold tank capacity	1.5 L
Hot tank capacity	1.5 L
Dispensing capacity (flow rate - Ltrs/min)	1.9
Target temperature - Cold Water	5°C
Target temperature - Hot Water	92°C
Max operating pressure	3 bar
CO2 operating pressure	No sparkling option
Max electrical consumption	Hot & Cold: 620 W Cold & Ambient: 100 W

Installations requirements

Power supply	220V - 240V / 50 - 60 Hz
Water supply	Potable Water / Min Pressure 2bar
CO2 Gas	N/A
Mains waste	Not required
Ventilation	An air gap of 100mm is required

CulliganTM
Water you love.TM

