



C100

Practical bottle-free water dispenser
for entry-level applications

- A great value dispenser that supplies refreshing filtered water for small to medium size workplaces.
- Ideal solution for perfectly cold, ambient and hot water at a competitive price.
- Carbon filtration for an unlimited supply of fresh, great tasting water.



Mains-fed water cooler
Countertop / Freestanding

Product features and benefits



Functional and convenient design

Simple, straightforward functionality without compromising on quality.

The 215 mm dispensing height is suitable to accommodate average size reusable bottles.

1200 ml drip tray capacity to collect accidental spillage.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.



Fine water quality


Simple push button dispense.

Carbon filtration removes impurities for superior quality water with improved taste and clarity.

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.



RECOMMENDED



FLOW RATE



User-friendly hydration point


The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.

Two-steps action hot water safety mechanism can help to avoid accidental spillage.


The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate reusable water bottles.



Technical specifications

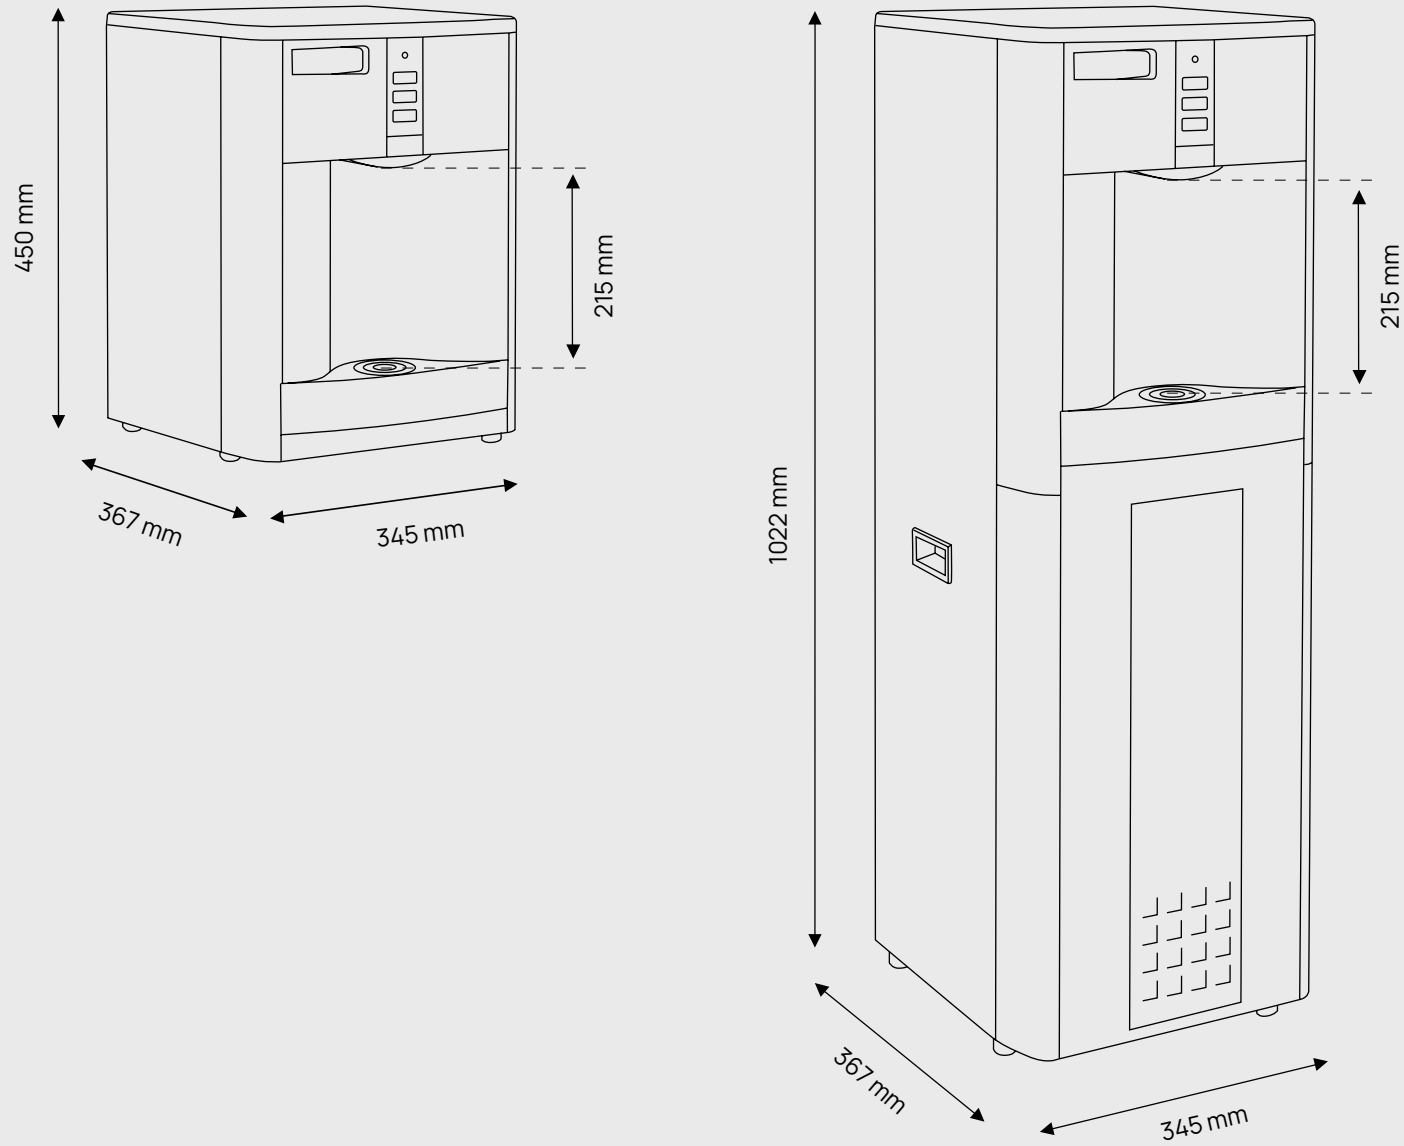

Water options

Ambient	Cold	Hot
		

Specifications

Model	Countertop	Freestanding
Dimensions W x H x D	345mm x 450mm x 367mm	345mm x 1022mm x 367mm
Variants	Hot & Cold, or Cold & Ambient	Hot & Cold, or Cold & Ambient
Weight	18 Kg	23 Kg
Dispensing area height	215mm	215mm
Drip tray capacity	1200 ml	1200 ml
Internal waste	No	No
External waste	Yes	Yes

Technology and performance

Water purification system	None	None
Antimicrobial protection	BioCote®	BioCote®
Recommended filtration	Carbon Block	Carbon Block
Refrigerant gas	R600a	R600a
Cooling technology	Cold tank	Cold tank
Cold tank capacity	2 L	2 L
Hot tank capacity	1.5 L	1.5 L
Dispensing capacity (flow rate - Ltrs/min)	1.8	1.8
Target temperature - Cold Water	5°C	5°C
Target temperature - Hot Water	87°C	87°C
Max operating pressure	3 bar	3 bar
CO2 operating pressure	No sparkling option	No sparkling option
Max electrical consumption	Hot & Cold: 600 W Cold & Ambient: 100 W	Hot & Cold: 600 W Cold & Ambient: 100 W

Installations requirements

Power supply	220V-240V / 50Hz	220V-240V / 50Hz
Water supply	Potable Water / Min Pressure 2bar	Potable Water / Min Pressure 2bar
CO2 Gas	N/A	N/A
Mains waste	Where the drip tray is connected to external waste	Where the drip tray is connected to external waste
Ventilation	An air gap of 100mm is required	An air gap of 100mm is required

CulliganTM
Water you love.TM

