



Mains-Fed Water Cooler
Countertop / Freestanding

C2 Firewall®

Bottle-free water dispenser
with excellent purifying performance,
easy operation and stylish design

- Perfect solution for any small or medium size workplace looking for great tasting purified water, reliability and guaranteed quality.
- Firewall® safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Practical water dispenser offering two water options.




Product features and benefits



Efficient and sustainable technology

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate reusable water bottles.



Versatile and compact design

The C2 Firewall® features sleek lines and a streamlined design with silver accent trims, seamlessly complementing any workplace interior.

Its simple and intuitive dispensing controls allows to easily choose between cold/hot or cold/ambient water at a simple press of a button.

The 230 mm dispensing height is suitable to accommodate average size reusable bottles.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.



RECOMMENDED



FLOW RATE



Best hygiene features

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.


Patented Firewall® UV-C purification technology guarantees microbiologically safe water by deactivating up to 99.9999% bacteria, 99.99% viruses, and 99.9% cysts.

99.9999%

Firewall® UV-C purification technology thoroughly purifies the water all the way through to the point of dispense.



Technical specifications

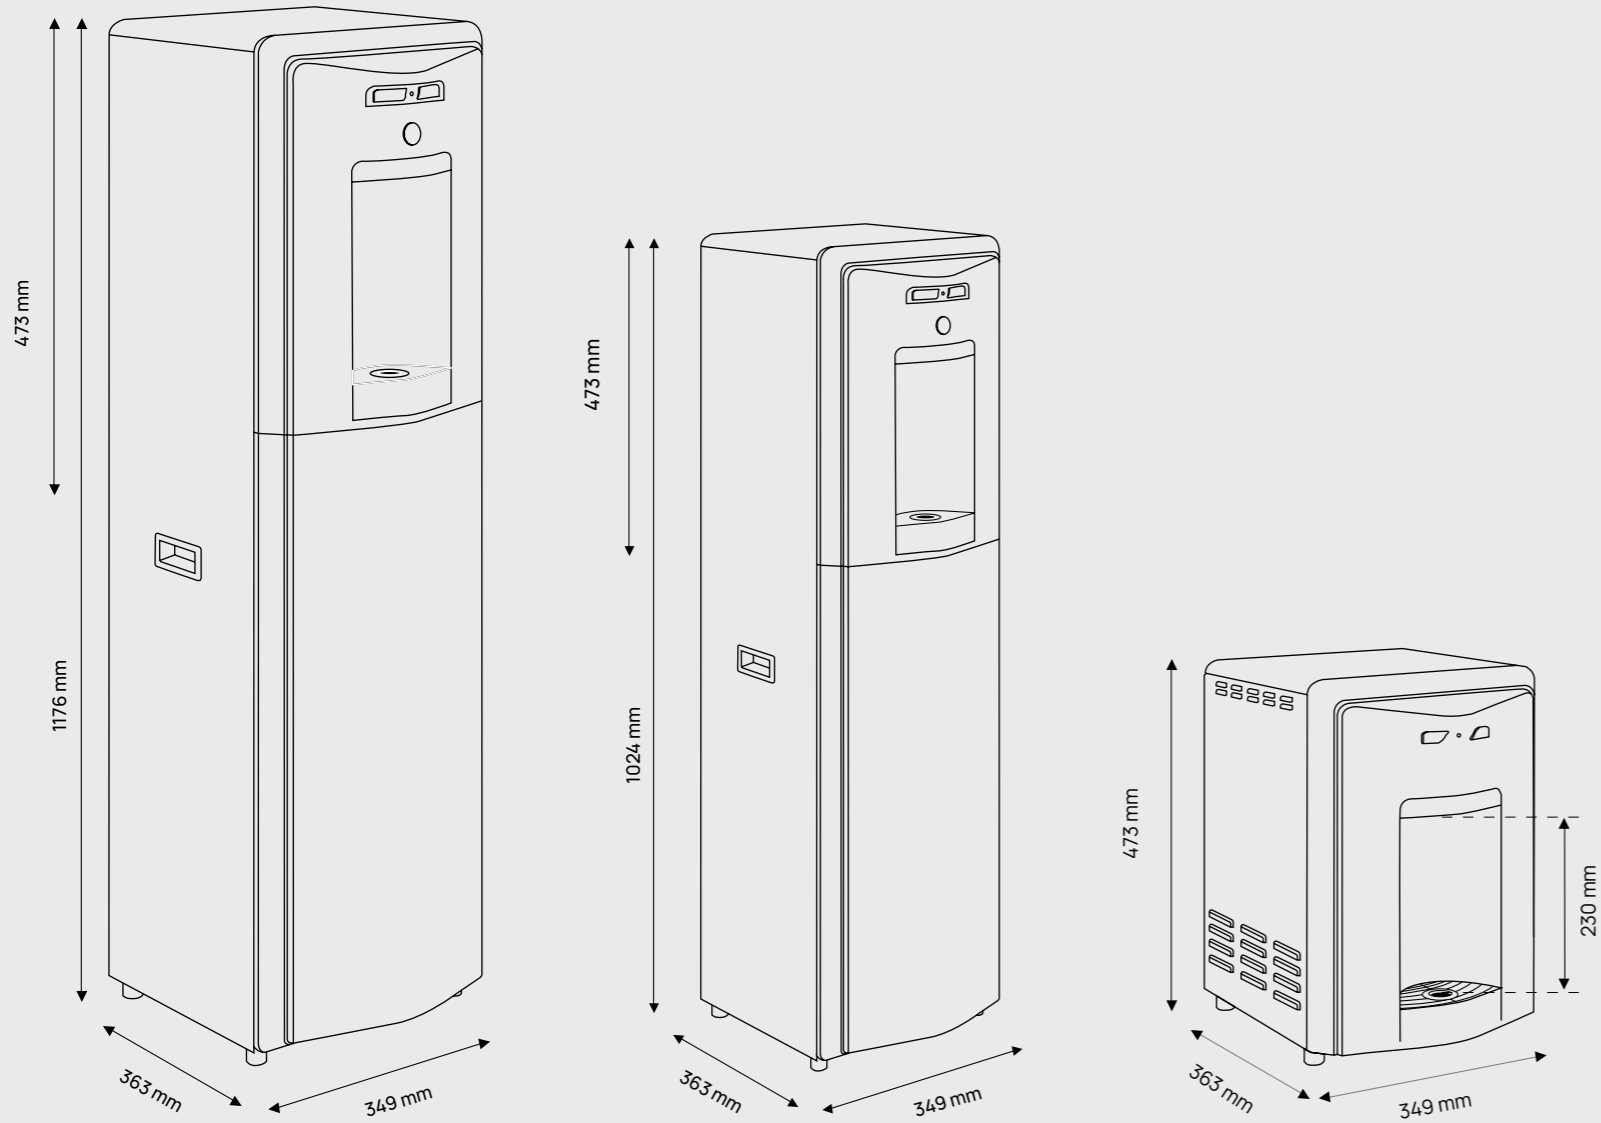

Water options

Ambient	Cold	Hot
	✖	☹
💧	✖	

Specifications

Model	Countertop	Freestanding
Dimensions W x H x D	340mm x 450mm x 370mm	340mm x 1040mm x 410mm
Variants	Hot & Cold, or Cold & Ambient	Hot & Cold, or Cold & Ambient
Weight	26 Kg	30 Kg
Dispensing area height	230 mm	230 mm
Drip tray capacity	350 ml	350 ml
Internal waste	No	No
External waste	No	No

Technology and performance

Water purification system	Firewall® UVC technology	Firewall® UVC technology
Antimicrobial protection	BioCote®	BioCote®
Recommended filtration	Carbon Block	Carbon Block
Refrigerant gas	R600a	R600a
Cooling technology	Cold tank	Cold tank
Cold tank capacity	2 L	4 L
Hot tank capacity	1.5 L	2 L
Dispensing capacity (flow rate - Ltrs/min)	1.7	1.7
Target temperature - Cold Water	5°C	5°C
Target temperature - Hot Water	87°C	87°C
Max operating pressure	3 bar	3 bar
CO2 operating pressure	No sparkling option	No sparkling option
Max electrical consumption	Hot & Cold: 930 W Cold & Ambient: 130 W	Hot & Cold: 930 W Cold & Ambient: 130 W

Installations requirements

Power supply	220V-240V / 50Hz	220V-240V / 50Hz
Water supply	Potable Water / Min Pressure 2bar	Potable Water / Min Pressure 2bar
CO2 Gas	N/A	N/A
Mains waste	Not required	Not required
Ventilation	An air gap of 100mm is required	An air gap of 100mm is required

Culligan™

Water you love.™

culligan.co.uk
0333 600 1845
sales.cuk@culligan.co.uk

