



**Mains-Fed Water Cooler**  
Countertop / Freestanding

# C2 Firewall®

Bottle-free water dispenser  
with excellent purifying performance,  
easy operation and stylish design

- Perfect solution for any small or medium size workplace looking for great tasting purified water, reliability and guaranteed quality.
- Firewall® safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Practical water dispenser offering two water options.



## Product features and benefits



### Efficient and sustainable technology

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate reusable water bottles.



### Versatile and compact design

The C2 Firewall® features sleek lines and a streamlined design with silver accent trims, seamlessly complementing any workplace interior.

Its simple and intuitive dispensing controls allows to easily choose between cold/hot or cold/ambient water at a simple press of a button.

The 230 mm dispensing height is suitable to accommodate average size reusable bottles.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.



RECOMMENDED



FLOW RATE



### Best hygiene features

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.


Patented Firewall® UV-C purification technology guarantees microbiologically safe water by deactivating up to 99.9999% bacteria, 99.99% viruses, and 99.9% cysts.

# 99.9999%

Firewall® UV-C purification technology thoroughly purifies the water all the way through to the point of dispense.



## Technical specifications

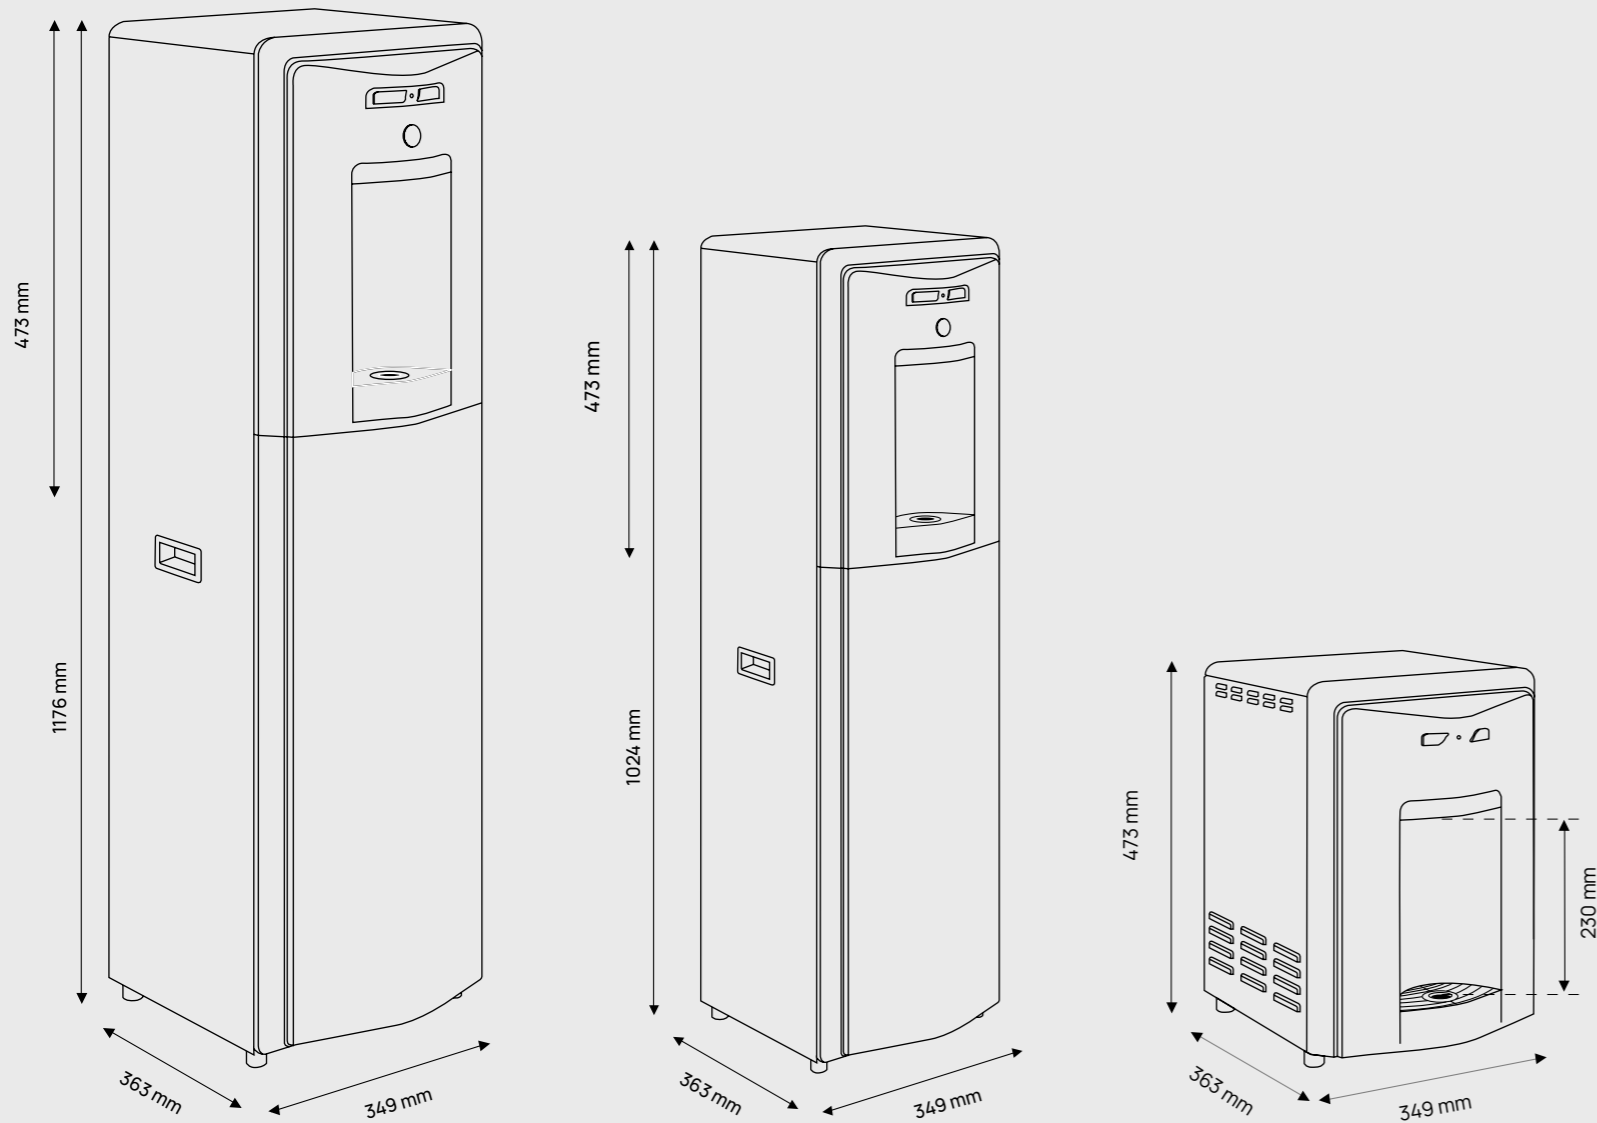

## Water options

Ambient	Cold	Hot
	✖	☹
💧	✖	

## Specifications

Model	Countertop	Freestanding
<b>Dimensions W x H x D</b>	340mm x 450mm x 370mm	340mm x 1040mm x 410mm
<b>Variants</b>	Hot & Cold, or Cold & Ambient	Hot & Cold, or Cold & Ambient
<b>Weight</b>	26 Kg	30 Kg
<b>Dispensing area height</b>	230 mm	230 mm
<b>Drip tray capacity</b>	350 ml	350 ml
<b>Internal waste</b>	No	No
<b>External waste</b>	No	No

## Technology and performance

<b>Water purification system</b>	Firewall® UVC technology	Firewall® UVC technology
<b>Antimicrobial protection</b>	BioCote®	BioCote®
<b>Recommended filtration</b>	Carbon Block	Carbon Block
<b>Refrigerant gas</b>	R600a	R600a
<b>Cooling technology</b>	Cold tank	Cold tank
<b>Cold tank capacity</b>	2 L	4 L
<b>Hot tank capacity</b>	1.5 L	2 L
<b>Dispensing capacity (flow rate - Ltrs/min)</b>	1.7	1.7
<b>Target temperature - Cold Water</b>	5°C	5°C
<b>Target temperature - Hot Water</b>	87°C	87°C
<b>Max operating pressure</b>	3 bar	3 bar
<b>CO2 operating pressure</b>	No sparkling option	No sparkling option
<b>Max electrical consumption</b>	Hot & Cold: 930 W Cold & Ambient: 130 W	Hot & Cold: 930 W Cold & Ambient: 130 W

## Installations requirements

<b>Power supply</b>	220V-240V / 50Hz	220V-240V / 50Hz
<b>Water supply</b>	Potable Water / Min Pressure 2bar	Potable Water / Min Pressure 2bar
<b>CO2 Gas</b>	N/A	N/A
<b>Mains waste</b>	Not required	Not required
<b>Ventilation</b>	An air gap of 100mm is required	An air gap of 100mm is required

# Culligan™

Water you love.™

culligan.ie  
1800 266 537  
sales@culligan.ie

