



Mains-Fed Water Cooler  
Countertop / Freestanding

# C3 Firewall

Modern and elegant bottle-free water dispenser with excellent purification performance

- Sleek aesthetics and reliability make this machine a popular product for small to medium size workplaces in the healthcare, educational and corporate environments.
- Firewall® safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Up to five water types on one unit.



## Product features and benefits



### Elegant and professional design

Compact and modern design crafted with durable silver-colored materials, to seamlessly complement any workplace interior.

Touch sensitive and intuitive controls facilitate the unit's performance for easy dispensing operation.

The user interface features LED UV fault indicator for easier servicing.

The 220 mm dispensing height is suitable to accommodate average size reusable bottles.

The drip tray comes in two different sizes, slim (235 mm dispensing height) and standard (220 mm dispensing height).

High capacity 300 ml removable drip tray featuring BioCote® antimicrobial surface protection.

Standby mode significantly reduces power consumption when the unit is not in use.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.



### Water of your choice

Variety of water options: Ambient, Cold, Sparkling, Hot and Extra Hot.

Two-steps action hot water safety mechanism can help to avoid accidental spillage.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate re-usable water bottles.

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.

1.6  
L/M

FLOW RATE



### Superior purification performance

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.

Patented Firewall® UV-C purification technology guarantees microbiologically safe water by deactivating up to 99.9999% bacteria, 99.99% viruses, and 99.9% cysts.


Touch-free dispensing enabled by the add-on infrared (IR) module for greater hygiene and piece of mind (optional).

99.9999%

Firewall® UV-C technology thoroughly purifies the water all the way through to the dispense point.



## Technical specifications

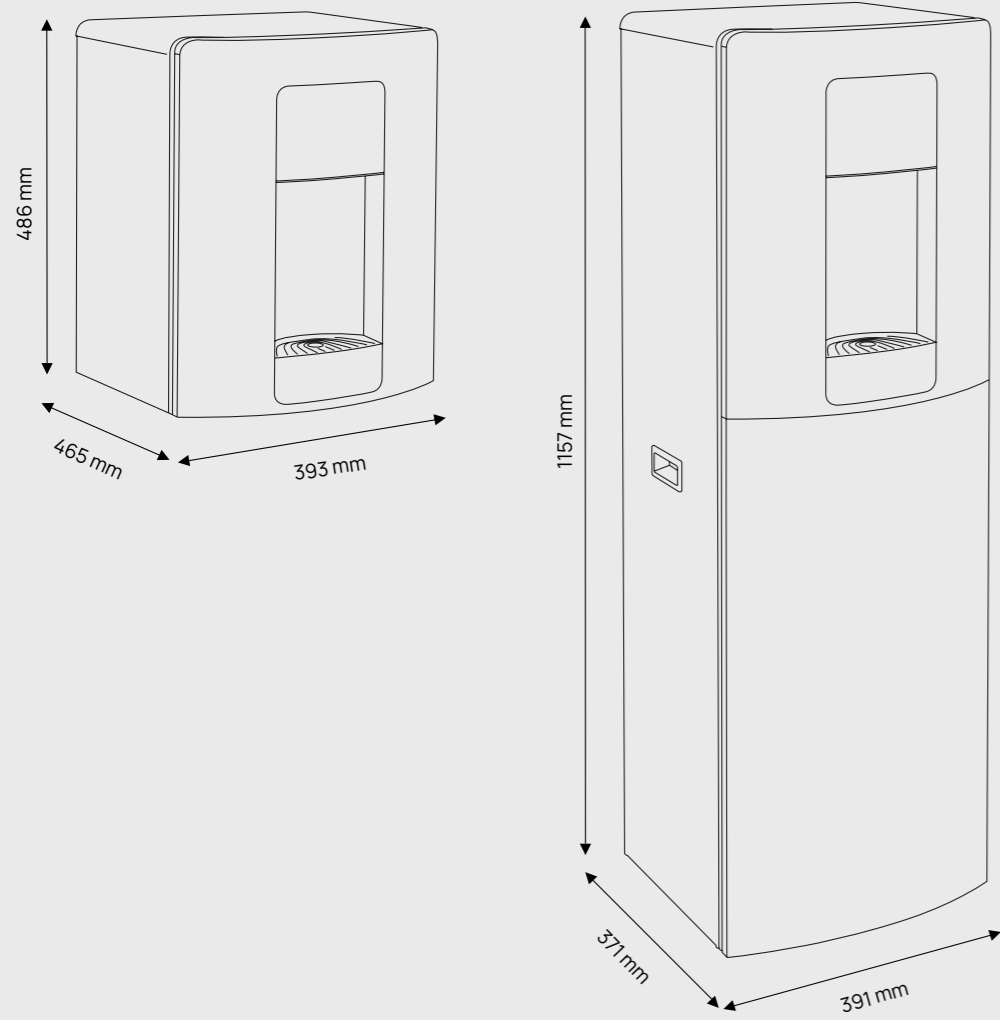

## Water options

Ambient	Cold	Sparkling	Hot	Extra Hot
	✱	⊖	☹	☹☹
💧	✱		☹	☹☹
💧	✱	⊖		
💧	✱			

## Specifications

Model	Countertop	Freestanding
<b>Dimensions</b>	393 mm (W) x 465 mm (D) x 486 mm (H)	391 mm (W) x 371 mm (D) x 1157 mm (H)
<b>Weight</b>	22 Kg (net) - 27 Kg (gross)	30 Kg (net) - 34 Kg (gross)
<b>Dispensing area height</b>	220/235 mm (depending on drip tray size chosen)	

## Technology and performance

<b>Water purification system</b>	Firewall® UV-C technology
<b>Recommended filtration</b>	Carbon Block (external installation, not included with the product)
<b>Refrigerant gas</b>	R600a
<b>Cooling technology</b>	Cold tank
<b>Tank</b>	Cold tank (HCA Freestanding): 4 L / Cold tank (HCA Countertop): 2 L Cold tank (HCS and CAS): 3 L / Hot tank (Countertop): 1.5 L / Hot tank (Freestanding): 2 L / Sparkling tank: 0.8 L
<b>Dispensing capacity (flow rate)</b>	1.8 L/m
<b>Min/max water temperature</b>	Cold: 5°C / Hot: 87°C / Extra Hot: 93°C
<b>Noise level</b>	35 dB
<b>Operating pressure</b>	3 bar
<b>CO<sub>2</sub> operating pressure</b>	3 - 4 bar
<b>Max electrical consumption</b>	950 W 5.6 A

## Installations requirements

<b>Power supply</b>	220V-240V/50Hz
<b>Compressor power</b>	1/8 HP
<b>Water connection</b>	1/4"
<b>Ventilation space</b>	10 cm

# Culligan™

Water you love.

culligan.com  
+1111 222 2222  
email@culligan.com

