



Bottle Filling Station
Portable

meetpat Portable

Portable hydration solution: Perfect for events, construction sites, and versatile settings.

- Optimal solution for venues requiring convenient, filtered water, reliability, and quality assurance.
- Hassle-free hose connection for quick setup.
- Portable, touch-free water dispenser, adaptable to any location.



Product features and benefits



On-the-go hydration

meetpat portable caters to events and projects with challenging water needs. Effortlessly move the unit around, ensuring hydration where and when it's needed.

Whether it's a construction site, outdoor event or temporary setup, the portable meetpat adapts to various environments with ease.

This refill station can also be linked with other units to aid scalability for any and all events.



Brand and customise

Transform your space with a branded water station. Customise it to showcase your brand or offer valuable information, creating a standout feature in any location.

Graphics are made from polycarbonate panels with anti-graffiti protection

4.5L
P/M

FLOW RATE



Easy to install and use

This must be the world's easiest hydration product to install. Just connect to a standard mains water tap, and you're ready to provide refreshing hydration.

No electrical connection required. Just place, connect to a water source, and the unit is ready to go.

Touch-free sensor activated dispense technology and a range of hygienic features ensure a hassle-free, refreshing experience for users.


This unit can also be fitted with a LoRaWAN sensor that can be linked to track live performance and usage.



Touchless technology ensuring hygienic hydration for all users.



Technical specifications

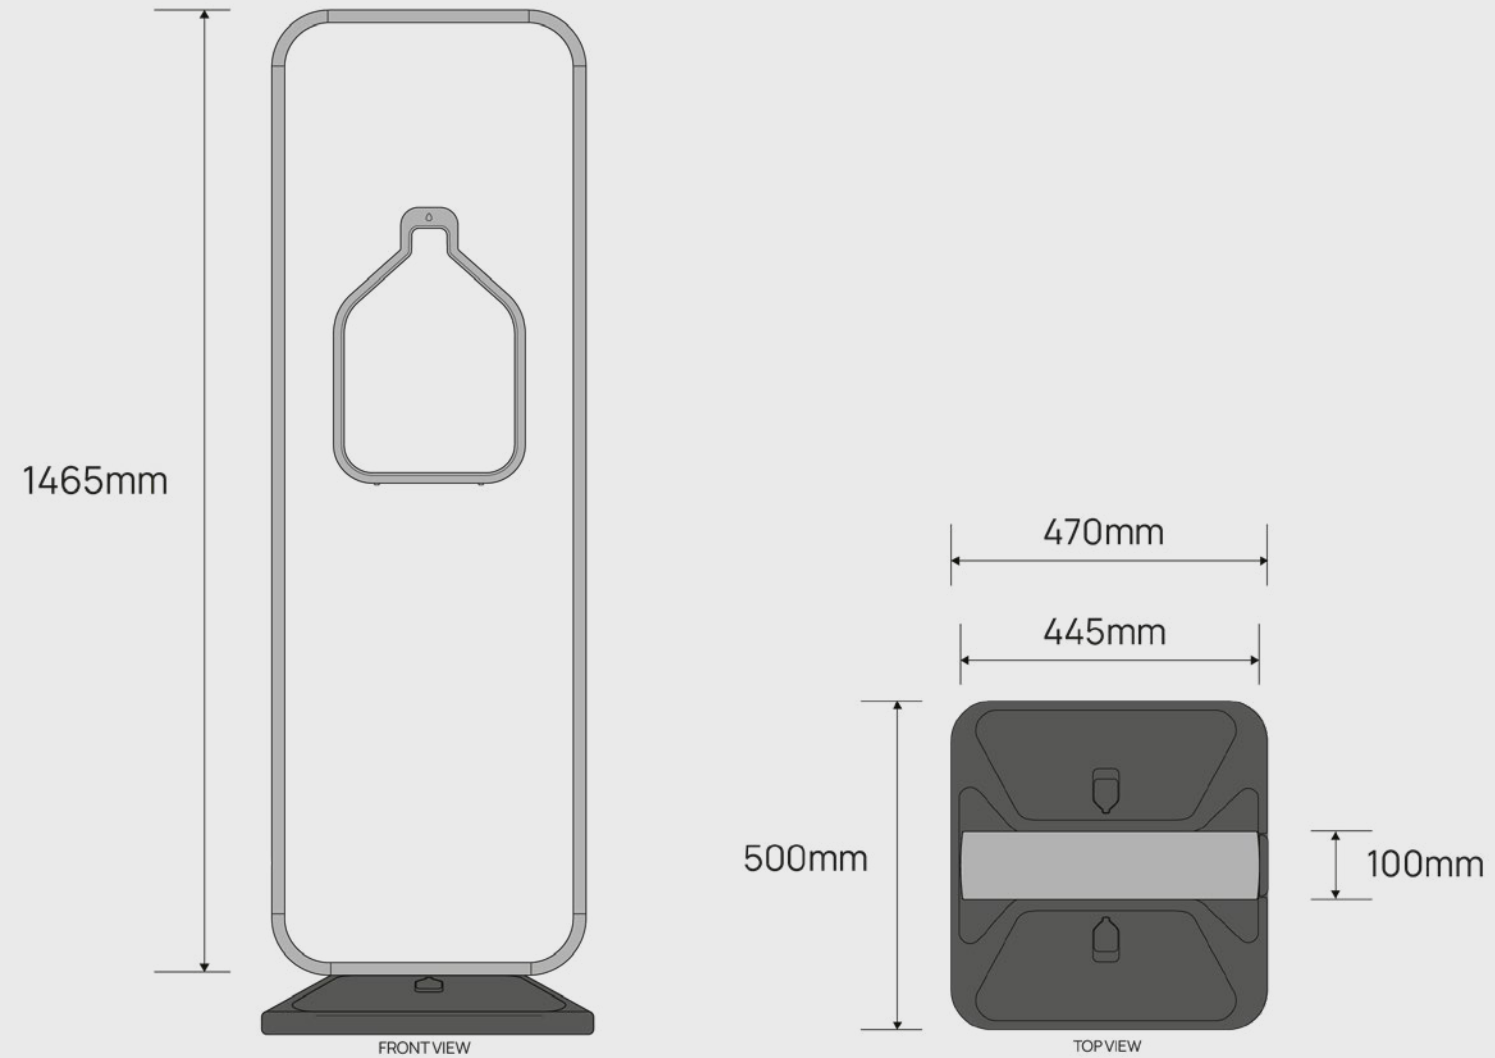

Water options

Ambient



Specifications

Dimensions W x H x D	470mm x 1565mm x 500mm (including base)
Tapware / Touch Free Sensor	Infrared sensor with impact resistant lens Located inside bottle refill window 4 x AA batteries. 10,000 activations (2-3 years for battery life)
Water Pressure	Max. 500kPa operating pressure (5 bar) Min. 120kPa operating pressure (1.2 bar)g
Flow Rate	Flow rate 4.5L per minute (pressure dependent)
Working Temp	1C minimum 38C maximum
Connectors	2 x stainless steel 1/2" threaded connectors
Power	No electrical connection required
Weight	Refill Station - 14.5kg Base - 4.7kg Panels - 3.2kg
Graphics Panel	Standard graphics Customised printing unique graphics
Recommended Filtration	Carbon block / meetpat filter
Installations requirements	
Water supply	Portable water / min pressure 1.2 bar
Power supply	N/A
Mains Waste	N/A

