Culligan

Wall-Mounted Manual Bottle Refill Stations and Fountains

Versatile, robust unit perfect for public buildings, gyms, hospitals, schools, and offices.

- Chilled and ambient options available
- Freshield® Antimicrobial Treatment for added hygiene.
- Intuitive design is easy to use and maintain

Bottle Filling Station P8SBFY - PSBF



OASIS

Product features and benefits



FLOW RATE

Sustainable hydration

The shallow basin is designed to eliminate splashing and standing water, ensuring a smooth delivery of water.

The bubbler valve has also been designed to be eco-friendly by reducing waste water by 50%.

L

Intuitive design that's easy to use

This bottle filling station is manually activated with a push of one of the four push pads, delivering ambient water easily.

It has a robust stainless steel finish making it easy to wipe-down and maintain. It also has a removable front for service and maintenance convenience.

+

Hygienic unit for busy environments


One piece, tamper proof water saver flex bubbler, with Freshield[®].


Freshield® protection utilises a silver-based antimicrobial compound ensures perfect hygiene, combating bacteria, fungus, and odours.

The built-in 100 micron strainer prevents any particles from contaminating the water before it enters the waterway, ensuring that users are provided with the purest water they can receive.



These units offer a large dispensing space, which is suitable for a variety of bottle filling requirements for users on the go.

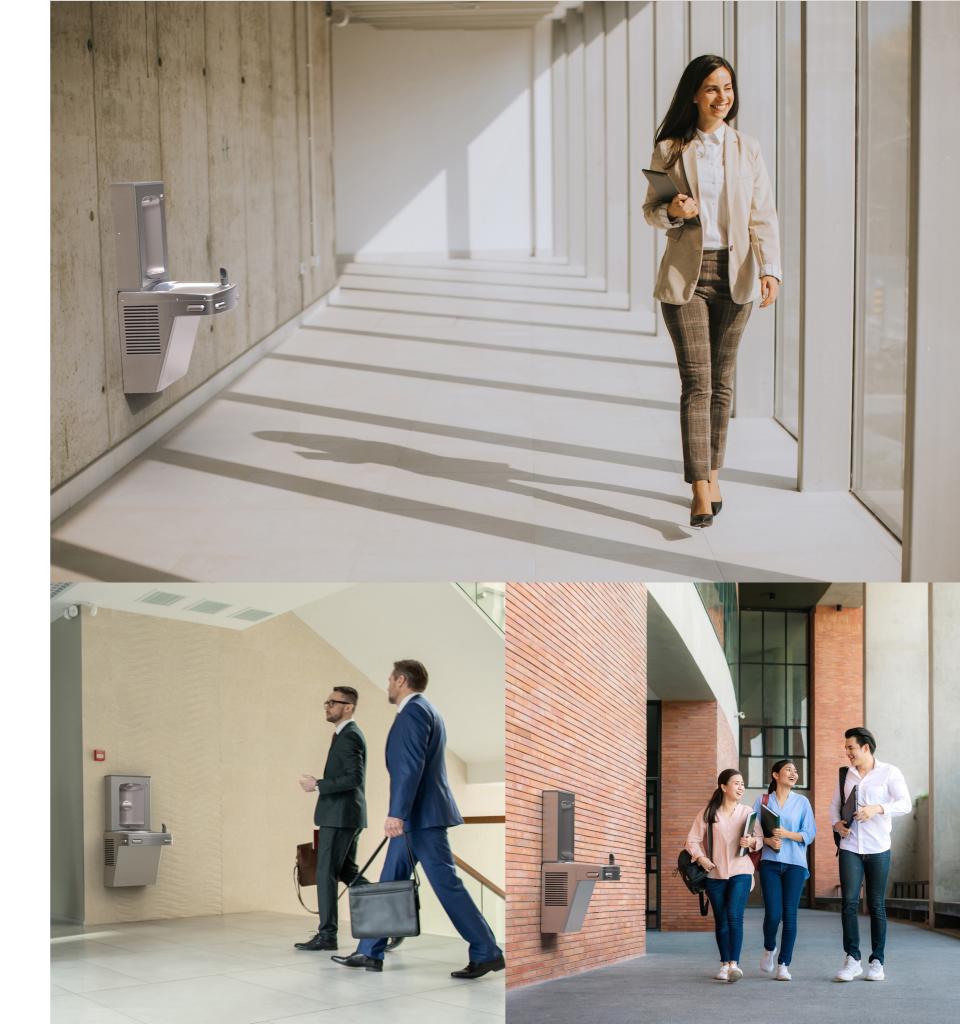

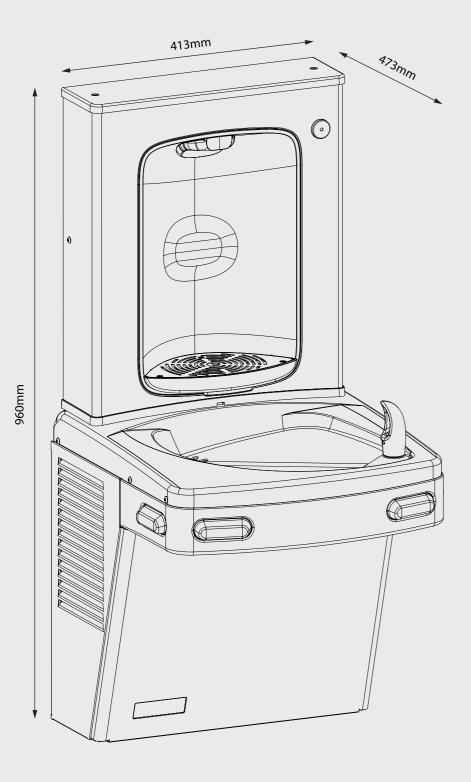

Specifications

Model
Filtration
H x W x D (mm)
Dispensing area height (mm)
Weight
Chilled water production
Water temperature
Operation
Certification

Installation requirements

Power supply	220-240V, 50/60Hz	N/A
Water supply	Minimum 2.5 Bar	Minimum 2.5 Bar
Mains waste Drainage required		Drainage required
Ventilation	Built-in ventilation on sides	Built-in ventilation on sides

Water options

Ambient	Cold	Cold	
	*		
0			

P8SFBY	PSBF
Option to add a filter	Option to add a filter
960 x 413 x 473	960 x 413 x 473
330	330
31 Kg	16 Kg
60 LPH	N/A
Chilled	Ambient
Manual	Manual
ADA, Reg 4	ADA

Hot

12/13/24



culligan.co.uk 0333 600 1845 sales.cuk@culligan.co.uk

